CorGuard FRP Frame Machining Sheet

Page ____ of ____

OSHKOSH Door Company

PHONE: 920-233-6161 - FAX: 800-782-1281 - EMAIL: orders@oshkoshdoor.com

Customer Name: _____

Customer PO #: _____ **ODC Quote #:** _____

Hinges / Pivots

- ☐ None or full surface
- ☐ Mortise continuous

Hinge size
Hinge depth
Template No.

Lock or Exit Device

- ☐ None or surface "exit only"

MFG or Type
Template No.
Strike size

Dead Lock

MFG or Type
Template No.
Strike size

Anchoring Options

- ☐ Standard Sill anchor only
- ☐ Optional existing masonry prep with cap
- ☐ Optional punch and dimple with pipe sleeve

All bolts, wire, stud or "T" strap anchors are by others

Construction

- ☐ Standard knock down
- ☐ Optional chemically welded

If unequal pair give door widths

- ☐ Single opening
- ☐ Paired opening

Finish

- ☐ Primed
- ☐ White
- ☐ Ivory
- ☐ Custom match
- ☐ Medium Grey
- ☐ Dark Brown
- ☐ Light Brown

Jamb Depth

- ☐ Standard 5 3/4" w/ 4 3/4" throat

Other Jamb depth _____ (4" or 6" up to 8 3/4")

Note: Not available on transom and mullion frames

Special Throat Size

Hinge and Lock locations

☐ Check for Cor-Guard standard locations

Measurement from underside of head bar to the Top of the hinge and the center line of strike preps

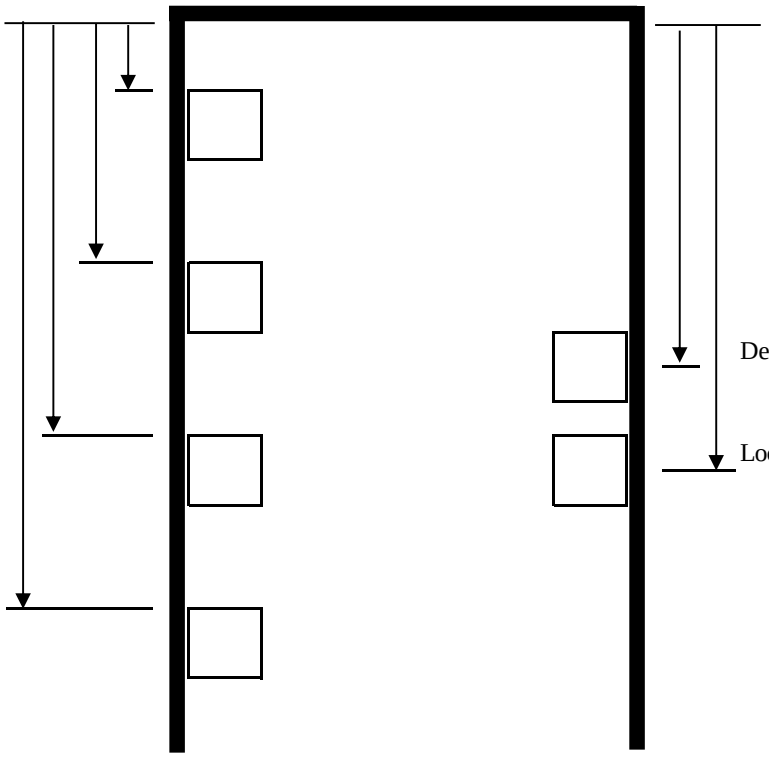

Door Opening Size

Width

Height

Head Bar

- ☐ Standard 2"
- ☐ Optional 4"

Frame Mark Number	Quantity RH	Quantity LH	Quantity RHR	Quantity LHR
TOTAL FRAMES THIS SHEET				

HAND OF DOOR

LH RH RH REV LH REV



KEYED SIDE OF LOCK